



Standard Features


- HSS Structural Tubing Frame, Floor, Wall, Roof
- Cambered Radius Roof Bows
- Aluminum Extrusion Trim Top And Bottom
- Screwless VHB Bonded Painted Aluminum Exterior Panels
- Fully Enclosed Wiring
- Led Exterior And Interior Lights
- One-Piece Aluminum Roof
- 4' Aluminum Barlocks
- Side Vent
- Zinc Coated Hardware

Specifications

Axle:	(2) 3,500 lb. Lippert Spring	Crossmembers:	Steel HSS 2.0" X 2.0"
Brakes:	Electric Self-Adjusting	Floor:	3/4" Plywood
Coupler:	10,000 lb. Stamped	Walls:	3/8" Plywood
Jack:	2,000 lb. Top-Wind Bolted	Wheels:	205/75R15 C Steel
Side Door:	36" x 66" with RV Latch	Electric Plug:	7 Wire RV
Floor D-Rings:	None	Ramp Rating:	800 lb. Midspan
Main Rails:	Steel HSS 3.0" X 2.0"		

Options

Rear Door	
Ramp	Barn Style

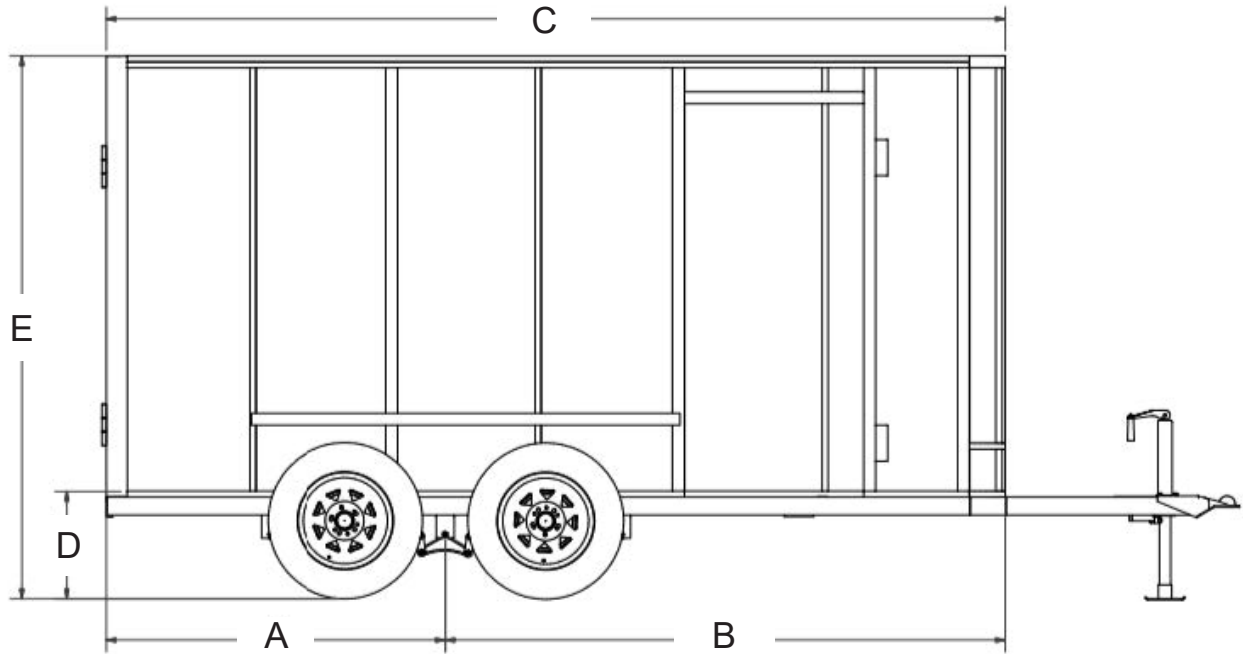

Dimensions

MODEL	A	B	C	D	E
LCHT35-612F-72	57"	94"	151"	17 7/16"	91 15/16"
LCHT35-614V-72	57"	112"	169"	17 7/16"	91 15/16"
LCHT35-614V-78	57"	112"	169"	17 7/16"	97 15/16"

Model	Rear Door Entrance	Space Between Fenders
LCHT35-612F-72	60 1/8"W X 66 7/16"H	69 1/4"
LCHT35-614V-72	60 1/8"W X 66 7/16"H	69 1/4"
LCHT35-614V-78	60 1/8"W X 72 7/16"H	69 1/4"

Model	Description	Net Weight	GVWR	Payload Cap.
LCHT35-612F-72	6' x 12' x 72" wall height, 3,500 lb. Tandem Axle Flat Nose	1,537 lb.	7,700 lb.	6,163 lb.
LCHT35-614V-72	6' x 12' x 72" wall height, 3,500 lb. Tandem Axle V-Nose	1,645 lb.	7,700 lb.	6,055 lb.
LCHT35-614V-78	6' x 12' x 78" wall height, 3,500 lb. Tandem Axle V-Nose	1,755 lb.	7,700 lb.	5,945 lb.



**SOUTHLAND
TRAILERS**



Specs are subject to change without notice. Please contact Southland Trailer Corp Product Specialist for price confirmation on all Products. - Revised January 2025